



# AquaAccess

## Barrier Free, Wall Mounted Water Cooler, 8 GPH

### SUGGESTED SPECIFICATIONS

Model A111108S is a self-contained, vandal resistant pressure water cooler that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated from both front and side push bars using less than 5 pounds of force. Bubbler shall be polished stainless steel with an integrally designed non-squirt feature and operate on water pressure range of 20-105 psig. Top shall be constructed from 304 stainless steel and have an integral drain. Cabinet shall be Granite powder coated on galvanized or stainless steel. Evaporator shall be an insulated, tube on tank. Cooling system shall use R-134a refrigerant and be capillary tube controlled. An adjustable thermostat with an off position shall control the refrigeration system. Unit shall adhere to ANSI A117.1 and Americans with Disabilities Act of 1990 frontal approach and protruding objects requirements, **Child ADA** parallel and frontal approach and ANSI/NSF 61, Section 9. Unit shall be listed by Underwriters Laboratories for both the US and Canada, compliant to the Air Conditioning and Refrigeration Institute Standard 1010.

**Standard Model:**  
A111108S

**Stainless Steel Model:**  
A111408S



Model A111408S Shown

### STANDARD FEATURES

- Both Child and Adult ADA Compliant (when properly installed)
- Granite powder coated apron and one-piece bottom wrapper
- Polished stainless steel, lead-free, anti-rotation non-squirt bubbler
- Copper tube on stainless steel tank evaporator
- 100 mesh inlet strainer
- Vandal resistant screws

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A111108S	8.0	400	4.8	60 lbs.
A111408S	8.0	400	4.8	60 lbs.

\* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature  
Compressor motor operates on 115 Volt / 60 Hz single phase.

### OPTIONAL ACCESSORIES (additional costs)

- BP8 Back panel, stainless steel
- CSC2 Concealed support carrier
- GF1 Glass filler with lever handle
- SO Sensor operated
- WB1 Wall bezel, stainless steel
- WF1 1500 gallon capacity, NSF 42+53, 1 micron lead reduction filter
- 220V 220 volt / 50 Hz compressor (C€)
- "4" All stainless steel (Use model A111408S)

Custom color finishes available upon request

Acorn Aqua™ assumes no responsibility for use of void or suspended data. © Copyright 2009 Acorn Aqua™, City of Industry, CA, A Division of Acorn Engineering Company. Please visit [www.acornaqua.com](http://www.acornaqua.com) for most current specifications.

Submittal # **A111108S**  
3/31/09

COMPLIES WITH STANDARDS



Test rating conditions are compliant with ARI 1010.



Member of Acorn Family of Companies

ACORN AQUA  
15125 Proctor Avenue  
City of Industry, CA  
91746 U.S.A.  
Phone 800-591-9360  
626-336-4561  
Fax 626-855-4894  
[www.acornaqua.com](http://www.acornaqua.com)




# TECHNICAL DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit [www.acornaqua.com](http://www.acornaqua.com) for most current specifications.

**Standard Model:**  
A111108S

**Stainless Steel Model:**  
A111408S

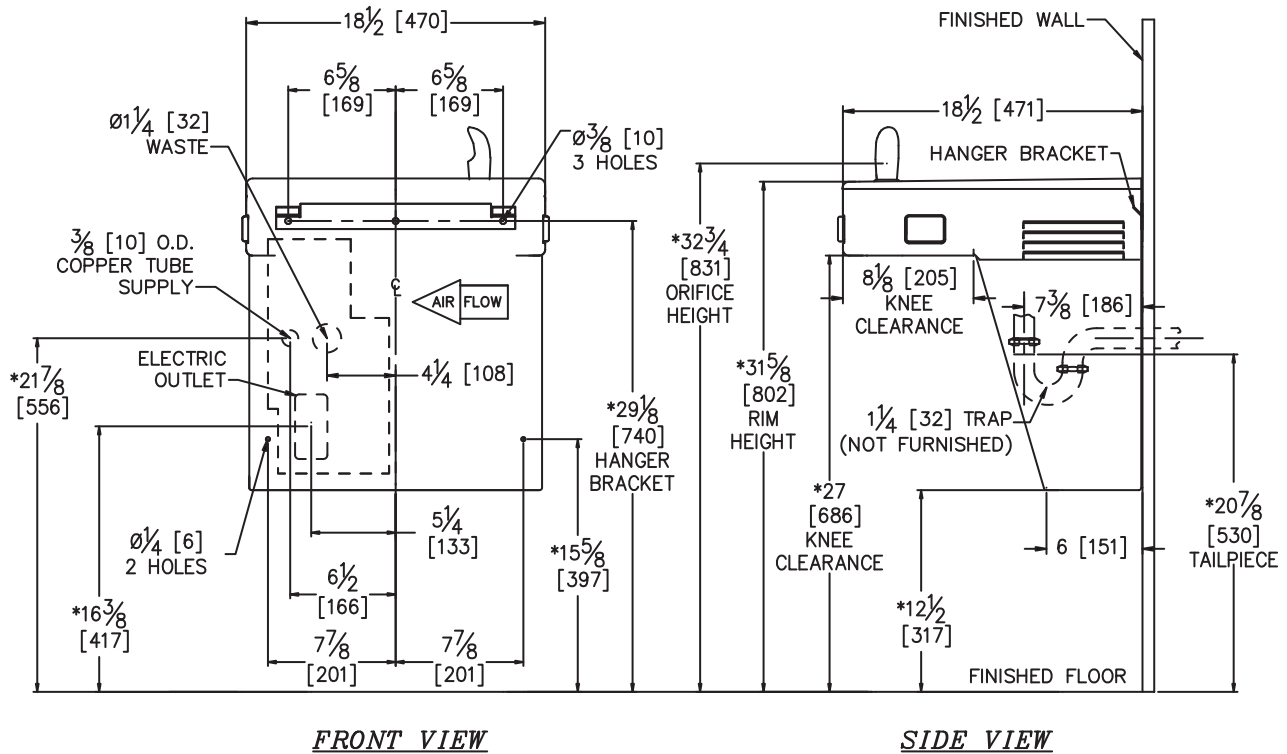

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. ALLOW 4 INCHES [102 MM] MINIMUM CLEARANCE PER SIDE FOR VENTILATION
- \*3. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
4. STOP VALVE, TRAP, & ELECTRICAL OUTLET NOT SUPPLIED.
5. IMPORTANT: COOLER MUST BE ATTACHED TO WALL WITH ANCHOR SCREWS.

**AquaAccess** Barrier Free, Wall Mounted Water Cooler, 8 GPH

Rough-in # **A111108S** 3/31/09

*Five Year Limited Warranty-* (Continental United States and Canada Only) The sealed refrigeration system and most major components are warranted for five (5) years. Other parts are warranted for one (1) year from date of installation.  
*Limited Export Warranty-* One (1) year on parts only.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	



Phone 800-591-9360  
626-336-4561  
[www.acornaqua.com](http://www.acornaqua.com)